



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) EP 1 292 011 A2

(12) EUROPEAN PATENT APPLICATION

(43) Date of publication:
12.03.2003 Bulletin 2003/11

(51) Int Cl.7: H02P 21/00

(21) Application number: 02018593.0

(22) Date of filing: 19.08.2002

(84) Designated Contracting States:
AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
IE IT LI LU MC NL PT SE SK TR
Designated Extension States:
AL LT LV MK RO SI

(72) Inventors:
• Yoshimoto, Kantaro
Yokohama-shi, Kanagawa (JP)
• Kitajima, Yasuhiko
Kamakura-shi, Kanagawa (JP)

(30) Priority: 10.09.2001 JP 2001273515

(74) Representative: Weber, Joachim, Dr.
Hoefer, Schmitz, Weber & Partner
Patentanwälte
Gabriel-Max-Strasse 29
81545 München (DE)


(71) Applicant: Nissan Motor Co., Ltd.
Yokohama-shi, Kanagawa (JP)

(54) Motor control for reducing high harmonic currents

(57) A motor control apparatus comprises a fundamental current control means (2) for controlling a fundamental current in a 3-phase AC motor (M) in an orthogonal coordinate system constituted of a d-axis and a q-axis rotating in synchronization with the rotation of the 3-phase AC motor (M), a higher harmonic current control means (3) for controlling a higher harmonic current in the motor (M) in an orthogonal coordinate system con-

stituted of a dh-axis and a qh-axis rotating at a frequency that is an integral multiple of the frequency of the fundamental component of the current flowing to the motor (M), an estimation means (35, 35A, 38) estimating the level of the harmonic speed electromotive force in the motor (M) in the dhqh-axis coordinate system and a compensation means (36) for compensates the harmonic speed electromotive force estimated by the estimation means.

FIG. 1

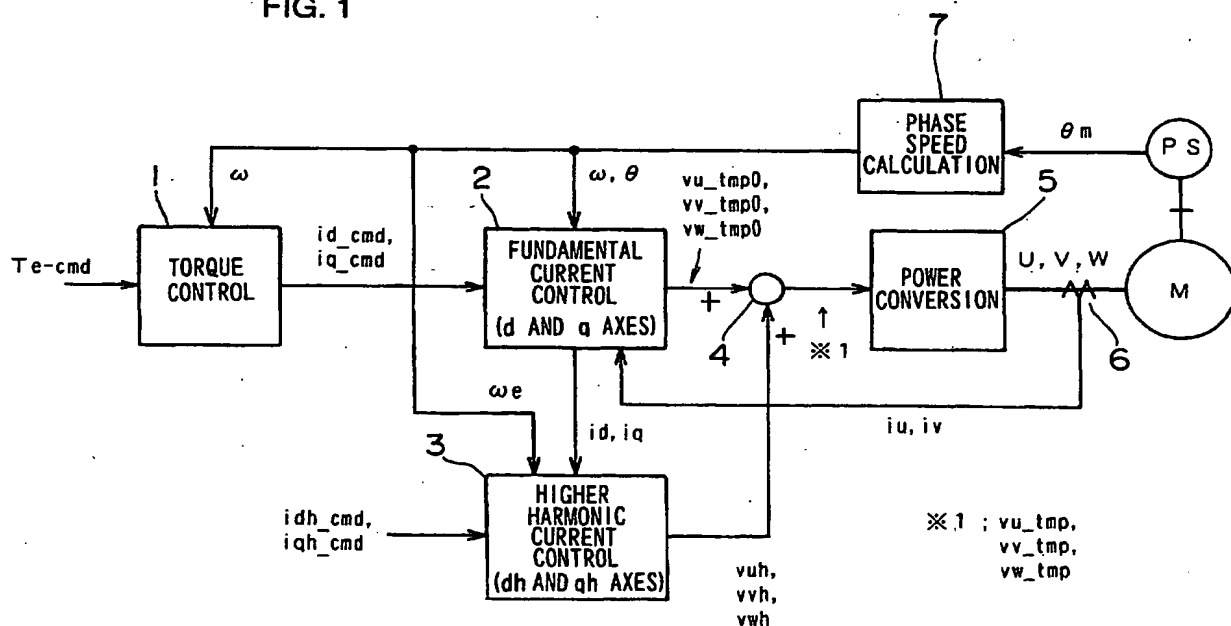

Description

[0001] The present invention relates to a motor control apparatus and motor control method, and more specifically, it relates to an apparatus of and method for controlling a motor to reduce the higher harmonic current flowing to a 3-phase AC motor.

[0002] The applicant of the present invention has proposed a motor control apparatus that reduces the higher harmonic current flowing to a 3-phase AC motor (Japanese Patent Application No. 2000-356117). This motor control apparatus includes a fundamental current control system that controls a fundamental current in a dq-axis orthogonal coordinate system rotating in synchronization with the rotation of the 3-phase AC motor and a higher harmonic current control system that controls a higher harmonic current in a dhqh-axis orthogonal coordinate system (a higher harmonic coordinate system) rotating at a frequency that is an integral multiple of the frequency of the fundamental component of the motor current.

[0003] In a steady state, the fundamental current is a direct current and the higher harmonic current is an alternating current in the dq-axis coordinate system in this motor control apparatus. Accordingly, the higher harmonic current manifesting as the alternating current quantity is extracted from the current in the dq-axis coordinate system by using a high pass filter and the extracted current is converted to a higher harmonic current in the dhqh-axis higher harmonic coordinate system so as to handle the higher harmonic current as the quantity of direct current. In addition, a PI control circuit is employed in the higher harmonic current control system to realize higher harmonic current control with minimum control deviation.

[0004] However, since the harmonic speed electromotive force in the dhqh-axis higher harmonic coordinate system poses a disturbance to the higher harmonic current control system, the higher harmonic current control system cannot achieve quick response simply by providing the PI control circuit in the higher harmonic current control system and, consequently, there is a problem in that the higher harmonic current cannot be reduced to a sufficient degree.

[0005] It would be desirable to be able to reduce the higher harmonic current flowing to a 3-phase AC motor.

[0006] The motor control apparatus according to the present invention comprises a fundamental current control means for controlling a fundamental current in a 3-phase AC motor in an orthogonal coordinate system constituted of a d-axis and a q-axis (hereafter referred to as a dq-axis coordinate system) rotating in synchronization with the rotation of the 3-phase AC motor, a higher harmonic current control means for controlling a higher harmonic current in the motor in an orthogonal coordinate system constituted of a dh axis and a qh axis (hereafter referred to as a dhqh-axis coordinate system) rotating at a frequency that is an integral multiple of the frequency of the fundamental component of the current flowing to the motor, an estimation means for estimating the level of the harmonic speed electromotive force in the motor in the dhqh-axis coordinate system and a compensation means for compensating the harmonic speed electromotive force estimated by the estimation means.

[0007] In the motor control method adopted in a motor control apparatus having a fundamental current control device that controls a fundamental current in a 3-phase AC motor in an orthogonal coordinate system constituted of a d-axis and a q-axis rotating in synchronization with the rotation of the 3-phase AC motor and a higher harmonic current control device that controls a higher harmonic current in the motor in an orthogonal coordinate system constituted of a dh-axis and a qh-axis rotating at a frequency that is an integral multiple of the frequency of a fundamental component of the current flowing to the motor, a harmonic speed electromotive force in the motor in the dhqh-axis coordinate system is estimated and the estimated harmonic speed electromotive force is compensated.

BRIEF DESCRIPTION OF THE DRAWINGS

[0008]

FIG. 1 illustrates the structure adopted in a first embodiment of the motor control apparatus according to the present invention;

FIG. 2 shows in detail the structures adopted in the fundamental current control circuit and the higher harmonic current control circuit in the first embodiment;

FIG. 3 presents the results of a simulation of the higher harmonic current control achieved in the first embodiment;

FIG. 4 shows in detail the structures adopted in the fundamental current control circuit and the higher harmonic current control circuit in a second embodiment;

FIG. 5 shows in detail the structures adopted in the fundamental current control circuit and the higher harmonic current control circuit in a third embodiment;

FIG. 6 shows in detail the structure adopted in the disturbance observer in the third embodiment; and

FIG. 7 presents the results of a simulation of the higher harmonic current control achieved in the third embodiment.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

First Embodiment

- 5 **[0009]** FIG. 1 illustrates the structure adopted in the motor control apparatus in the first embodiment. The motor control apparatus in the embodiment implements vector control through which a torque control performance level comparable to that of control on a DC motor is achieved even when a 3-phase AC motor is used. It is to be noted that a motor M in the embodiment is a permanent magnet 3-phase synchronous motor.
- 10 **[0010]** A torque control circuit 1 calculates a d-axis fundamental current command value i_{d_cmd} and a q-axis fundamental current command value i_{q_cmd} in a dq-axis coordinate system by using a current command value table (not shown) based upon a torque command value T_{e_cmd} and an electrical rotation speed ω (to be detailed later) of the 3-phase synchronous motor M. The dq-axis coordinate system is an orthogonal coordinate system constituted of a d-axis and a q-axis, rotating at an electrical rotation speed which is an integral multiple of the mechanical rotation speed of the 3-phase synchronous motor M. Thus, in conjunction with a 3-phase synchronous motor, the dq-axis coordinate system rotates in synchronization with the motor rotation.
- 15 **[0011]** A fundamental current control circuit 2 controls a fundamental current in the dq-axis coordinate system. While further details are to be provided later, the fundamental current control circuit 2 converts actual currents i_u and i_v in the 3-phase synchronous motor M to actual currents i_d and i_q along the d-axis and the q-axis respectively and calculates fundamental voltage command values v_{u_tmp0} , v_{v_tmp0} and v_{w_tmp0} to be used to match the d-axis actual current i_d and the q-axis actual current i_q with the fundamental current command values i_{d_cmd} and i_{q_cmd} respectively.
- 20 **[0012]** A higher harmonic current control circuit 3 controls a higher harmonic current in a dhqh-axis higher harmonic coordinate system. The dhqh-axis higher harmonic coordinate system is an orthogonal coordinate system constituted of a dh-axis and a qh-axis, rotating at a frequency that is an integral multiple of the frequency of the fundamental components of the currents flowing to the 3-phase synchronous motor M. While further details are to be provided later, the higher harmonic current control circuit 3 extracts higher harmonic components i_{dh} and i_{qh} in the dhqh-axis higher harmonic coordinate system from the d-axis actual current i_d and the q-axis actual current i_q and calculates higher harmonic voltage command values v_{uh} , v_{vh} and v_{wh} to be used to match the dh-axis higher harmonic current i_{dh} and the qh-axis higher harmonic current i_{qh} with higher harmonic current command values i_{dh_cmd} and i_{qh_cmd} respectively.
- 25 **[0013]** An adder 4 adds the higher harmonic voltage command values v_{uh} , v_{vh} and v_{wh} obtained at the higher harmonic current control circuit 3 respectively to the fundamental voltage command values v_{u_tmp0} , v_{v_tmp0} and v_{w_tmp0} obtained at the fundamental current control circuit 2, to calculate 3-phase AC voltage command values v_{u_tmp} , v_{v_tmp} and v_{w_tmp} . A power conversion circuit 5 is an inverter constituted of a power conversion element such as an IGBT. The power conversion circuit 5 switches a DC voltage from a DC source (not shown) which may be a battery in conformance to the 3-phase voltage command values v_{u_tmp} , v_{v_tmp} and v_{w_tmp} to generate 3-phase AC voltages U, V and W and then applies the 3-phase AC voltages thus generated to the 3-phase AC motor M.
- 30 **[0014]** An encoder PS, which is connected to the 3-phase synchronous motor M, detects the rotational position θ_m of the motor M. A current sensor 6 detects the actual current i_u at a U-phase and the actual current i_v at a V-phase in the 3-phase synchronous motor M. A phase speed calculating circuit 7 calculates the electrical rotation speed (angular speed) ω which is an integral multiple of the mechanical rotation speed (angular speed) ω_m of the 3-phase synchronous motor M and also calculates an electrical rotational phase θ , based upon a motor rotational position signal θ_m provided by the encoder PS. It is to be noted that the electrical rotation speed (angular speed) ω indicates the frequency (angular frequency) of the AC currents flowing to the 3-phase synchronous motor M.
- 35 **[0015]** FIG. 2 shows in detail the structures adopted in the fundamental current control circuit 2 and the higher harmonic current control circuit 3 in the first embodiment. In the first embodiment, a circuit for compensating the harmonic speed electromotive force at the motor M is added in conjunction with the fundamental current control circuit 2 and the higher harmonic current control circuit 3. The fundamental current control circuit 2 includes a 3-phase/dq conversion circuit 21, a subtractor 22, a PI-dq current control circuit 23, a non-interactive control circuit 24, an adder 25 and a dq/3-phase conversion circuit 26.
- 40 **[0016]** The 3-phase/dq conversion circuit 21 converts the actual currents i_u and i_v flowing in the 3-phase synchronous motor detected by the current sensor 6 to the d-axis actual current i_d and the q-axis actual current i_q respectively. The subtractor 22 calculates the deviations ($i_{d_cmd} - i_d$, $i_{q_cmd} - i_q$) by subtracting the actual currents i_d and i_q from the d-axis current command value i_{d_cmd} and the q-axis current command value i_{q_cmd} respectively. The PI-dq current control circuit 23 calculates a d-axis voltage command value and a q-axis voltage command value by implementing a PI (proportional integral) control for the fundamental current deviations ($i_{d_cmd} - i_d$) and ($i_{q_cmd} - i_q$).
- 45 **[0017]** The non-interactive control circuit 24, which improves the response of the d-axis current and the q-axis current by compensating the speed electromotive force in the dq-axis coordinate system, calculates a d-axis compensating voltage v_{d_cmp} and a q-axis compensating voltage v_{q_cmp} for compensating the speed electromotive force in the

dq-axis coordinate system. The adder 25 adds the d-axis compensating voltage v_{d_cmp} and the q-axis compensating voltage v_{q_cmp} respectively to the d-axis voltage command value and the q-axis voltage command value output from the PI-dq current control circuit 23, to calculate a d-axis voltage command value v_{d_cmd} and a q-axis voltage command value v_{q_cmd} .

[0018] The dq/3-phase conversion circuit 26 converts the d-axis voltage command value v_{d_cmd} and the q-axis voltage command value v_{q_cmd} to the U-phase fundamental voltage command value v_{u_tmp0} , the V-phase fundamental voltage command value v_{v_tmp0} and the W-phase fundamental voltage command value v_{w_tmp0} in a 3-phase AC coordinate system.

[0019] The higher harmonic current control circuit 3 includes a high pass filter 31, a dq/dhqh conversion circuit 32, a subtractor 33, a PI-dhqh current control circuit 34, a harmonic speed electromotive force estimating circuit 35, an adder 36 and a dhqh/3-phase conversion circuit 37.

[0020] The high pass filter 31 extracts the higher harmonic components of the current flowing to the motor M by filtering the d-axis actual current i_d and the q-axis current i_q obtained at the 3-phase/dq conversion circuit 21. The dq/dhqh conversion circuit 32 converts the higher harmonic currents extracted by the high pass filter 31 to a dh-axis higher harmonic current i_{dh} and a qh-axis higher harmonic current i_{qh} . The subtractor 33 calculates the deviations ($i_{dh_cmd} - i_{dh}$) and ($i_{qh_cmd} - i_{qh}$) by subtracting the dh-axis higher harmonic current i_{dh} and the qh-axis higher harmonic current i_{qh} from the dh-axis current command value i_{dh_cmd} and the qh-axis current command value i_{qh_cmd} respectively. The PI-dhqh current control circuit 34 calculates a dh-axis voltage command value and a qh-axis voltage command value by implementing a PI (proportional integral) control for the higher harmonic current deviations ($i_{dh_cmd} - i_{dh}$) and ($i_{qh_cmd} - i_{qh}$).

[0021] The harmonic speed electromotive force estimating circuit 35 calculates a dh-axis harmonic speed electromotive force K_{dhw} and a qh-axis harmonic speed electromotive force K_{qhw} in order to improve the response of the dh-axis current and the qh-axis current by compensating the speed electromotive force in the dhqh-axis higher harmonic coordinate system. The method to be adopted to calculate the dh-axis harmonic speed electromotive force K_{dhw} and the qh-axis harmonic speed electromotive force K_{qhw} is to be detailed later. The adder 36 adds the dh-axis harmonic speed electromotive force K_{dhw} and the qh-axis harmonic speed electromotive force K_{qhw} respectively to the dh-axis voltage command value and the qh-axis voltage command value output from the PI-dhqh current control circuit 34 to calculate a dh-axis voltage command value v_{dh_cmd} and a qh-axis voltage command value v_{qh_cmd} .

[0022] The dhqh/3-phase conversion circuit 37 converts the dh-axis voltage command value v_{dh_cmd} and the qh-axis voltage command value v_{qh_cmd} to the U-phase higher harmonic voltage command value v_{uh} , the V-phase higher harmonic voltage command value v_{vh} and the W-phase higher harmonic voltage command value v_{wh} in the 3-phase AC coordinate system.

[0023] As described above, the adder 4 adds the fundamental voltage command values v_{u_tmp0} , v_{v_tmp0} and v_{w_tmp0} obtained at the fundamental current control circuit 2 respectively with the higher harmonic voltage command values v_{uh} , v_{vh} and v_{wh} obtained at the higher harmonic current control circuit 3 for the individual phases to calculate the 3-phase AC voltage command values v_{u_tmp} , v_{v_tmp} and v_{w_tmp} .

[0024] Now, the method adopted to calculate the dh-axis harmonic speed electromotive force K_{dhw} and the qh-axis harmonic speed electromotive force K_{qhw} in the harmonic speed electromotive force estimating circuit 35 is explained. The higher harmonic component of the inductance which causes the harmonic speed electromotive force is constituted of the spatial harmonic components of the self inductances at the U phase, the V phase and the W phase, which are expressed as 3-phase AC circuit equations. The self inductances L_u , L_v and L_w at the U phase, the V phase and the W phase are expressed as in (1) below.

$$\begin{aligned}
 L_u &= L_{g0} + \sum L_n \cos 2n\theta \\
 L_v &= L_{g0} + \sum L_n \cos n \left(2\theta + \frac{2}{3}\pi \right) \\
 L_w &= L_{g0} + \sum L_n \cos n \left(2\theta - \frac{2}{3}\pi \right)
 \end{aligned}
 \quad \dots \quad (1)$$

In expression (1), L_{g0} represents the DC component of the inductance in the 3-phase synchronous motor M, L_n ($n = 1, 2, \dots$) represents the AC component of the inductance in the motor M and θ represents the electrical rotational phase of the motor M mentioned earlier. When $n = 1$, the second term on the right side indicates the saliency of an IPM motor assuming a standard internally embedded magnet structure. The higher harmonic components in the self inductances

Lu, Lv and Lw at the individual phases when $n \geq 2$ poses as a possible cause for the generation of a harmonic speed electromotive force.

[0025] If a higher harmonic component is contained in the magnetic flux of the permanent magnet in a permanent magnet synchronous motor, the higher harmonic component generates a harmonic speed electromotive force. A circuit equation for the dq-axis coordinate system when $n = 2, 5, 8 \dots$, obtained by taking into consideration these inductances of higher order and the higher harmonic component in the magnetic flux of the permanent magnet is as expressed in (2) below.

$$\begin{aligned}
 \begin{bmatrix} V_d \\ V_q \end{bmatrix} &= \begin{bmatrix} R & -L_{g0}\omega \\ L_{g0}\omega & R \end{bmatrix} \begin{bmatrix} i_d \\ i_q \end{bmatrix} + L_{g0} p \begin{bmatrix} i_d \\ i_q \end{bmatrix} + \begin{bmatrix} 0 \\ \omega\phi \end{bmatrix} + \begin{bmatrix} e_{dk} \\ e_{qk} \end{bmatrix} \\
 &+ \frac{L_1\omega}{2} \begin{bmatrix} 0 & 1 \\ 1 & 0 \end{bmatrix} \begin{bmatrix} i_d \\ i_q \end{bmatrix} + \frac{L_1}{2} \begin{bmatrix} 1 & 0 \\ 0 & -1 \end{bmatrix} \begin{bmatrix} pi_d \\ pi_q \end{bmatrix} \\
 &+ (2n+1) \frac{L_n\omega}{2} \begin{bmatrix} \sin(-(2n+2)\theta) & -\cos(-(2n+2)\theta) \\ -\cos(-(2n+2)\theta) & -\sin(-(2n+2)\theta) \end{bmatrix} \begin{bmatrix} i_d \\ i_q \end{bmatrix} \\
 &+ \frac{L_n}{2} \begin{bmatrix} \cos(-(2n+2)\theta) & \sin(-(2n+2)\theta) \\ \sin(-(2n+2)\theta) & -\cos(-(2n+2)\theta) \end{bmatrix} \begin{bmatrix} pi_d \\ pi_q \end{bmatrix} \dots \quad (2)
 \end{aligned}$$

While expression (2) includes "n" representing a single element, the corresponding terms should be incorporated into expression (2) if there are elements of any other orders. In expression (2), v_d and v_q respectively represent the d-axis voltage and the q-axis voltage, R represents the winding resistance in the motor M and ϕ represents the magnetic flux of the permanent magnet. In addition, e_{dk} represents the d-axis higher harmonic component in the speed electromotive force attributable to the magnetic flux of the permanent magnet and e_{qk} represents the q-axis higher harmonic component in the speed electromotive force attributable to the magnetic flux of the permanent magnet. The term constituted of the product of ω , which is seen in the third column of expression (2), represents the harmonic speed electromotive force attributable to the higher harmonic components in the inductances.

[0026] A transformation matrix of the conversion from the dq-axis coordinate system to the dhqh-axis higher harmonic coordinate system is expressed as in (3) below.

$$[C] = \begin{bmatrix} \cos\theta_h & \sin\theta_h \\ -\sin\theta_h & \cos\theta_h \end{bmatrix} \dots \quad (3)$$

Expression (3) is based upon the premise that $\theta_h = -(2n+2)\theta$.

[0027] Assuming that the higher harmonic components in the magnetic flux of the permanent magnet are expressed as in (4), the circuit equation in the dhqh-axis higher harmonic coordinate system is expressed as in (5) below.

$$\begin{bmatrix} e_{dk} \\ e_{qk} \end{bmatrix} = \phi_s \omega \begin{bmatrix} \sin\theta_h \\ -\cos\theta_h \end{bmatrix} \dots \quad (4)$$

$$\begin{aligned}
\begin{bmatrix} V_{dh} \\ V_{qh} \end{bmatrix} &= \begin{bmatrix} R & (2n+1)L_{g0}\omega \\ -(2n+1)L_{g0}\omega & R \end{bmatrix} \begin{bmatrix} i_{dh} \\ i_{qh} \end{bmatrix} + L_{g0}P \begin{bmatrix} i_{dh} \\ i_{qh} \end{bmatrix} + \begin{bmatrix} e_{d0} \\ e_{q0} \end{bmatrix} + \begin{bmatrix} e_{dh} \\ e_{qh} \end{bmatrix} \\
&+ (2n+3) \frac{L_1\omega}{2} \begin{bmatrix} \sin 2\theta_h & \cos 2\theta_h \\ \cos 2\theta_h & -\sin 2\theta_h \end{bmatrix} \begin{bmatrix} i_{dh} \\ i_{qh} \end{bmatrix} + \frac{L_1}{2} \begin{bmatrix} \cos 2\theta_h & -\sin 2\theta_h \\ -\sin 2\theta_h & -\cos 2\theta_h \end{bmatrix} \begin{bmatrix} pi_{dh} \\ pi_{qh} \end{bmatrix} \dots \quad (5) \\
&- (2n+1) \frac{L_n\omega}{2} \begin{bmatrix} 0 & 1 \\ 1 & 0 \end{bmatrix} \begin{bmatrix} i_d \\ i_q \end{bmatrix} + \frac{L_n}{2} \begin{bmatrix} 1 & 0 \\ 0 & -1 \end{bmatrix} \begin{bmatrix} pi_d \\ pi_q \end{bmatrix}
\end{aligned}$$

In expression (4), ϕ_5 represents the higher harmonic component of the fifth order in the magnetic flux of the permanent magnet. In expression (5), v_{dh} and v_{qh} represent the dh-axis voltage and the qh-axis voltage respectively. In addition, e_{d0} and e_{q0} represent speed electromotive forces obtained by converting the fundamental component $\omega\phi$ of the speed electromotive force attributable to the magnetic flux of the permanent magnet in the dq-axis coordinate system to values in the dhqh-axis coordinate system. e_{dh} and e_{qh} represent harmonic speed electromotive forces obtained by converting the harmonic speed electromotive forces e_{dk} and e_{qk} attributable to the magnetic flux of the permanent magnet in the dq-axis coordinate system to values in the dhqh-axis coordinate system. e_{dh} and e_{qh} can be expressed as in (6) below when the higher harmonic components of the magnetic flux of the permanent magnet are expressed as in (4).

$$\begin{bmatrix} e_{dh} \\ e_{qh} \end{bmatrix} = \phi_5\omega \begin{bmatrix} 0 \\ -1 \end{bmatrix} \dots \quad (6)$$

[0028] When the conversion from the dq-axis coordinate system to the dhqh-axis higher harmonic coordinate system is performed, the dq-axis values can be converted to values in a coordinate system corresponding to the rotation of any higher harmonic current component among the higher harmonic current components contained in the motor current. When the largest higher harmonic current contained in the motor current is controlled, for instance, the term of the harmonic speed electromotive force constituting the cause for the generation of the higher harmonic current, too, is expressed as a direct current quantity.

[0029] The terms that include the speed ω appearing in the first and second columns and e_{d0} and e_{q0} in the first column in expression (5) are compensated through standard non-interactive control implemented in the dq-axis coordinate system. This leaves the term constituted of the higher harmonic components in the magnetic flux of the magnet in the first column and the term constituted of the motor inductance higher harmonic components in the third column, both representing harmonic speed electromotive forces, which slow down the current control response in the dhqh-axis higher harmonic coordinate system.

[0030] Accordingly, the harmonic speed electromotive force estimating circuit 35 ascertains a dh-axis component e_{Ldh} and a qh-axis component e_{Lqh} of the harmonic speed electromotive force attributable to the higher harmonic components in the inductances in the motor M based upon expression (5). The harmonic speed electromotive forces e_{Ldh} and e_{Lqh} attributable to the motor inductance higher harmonic components can be calculated as in (7) below based upon the order n of the motor inductance and the values of the components of that order (the motor inductance higher harmonic component), the d-axis fundamental current i_d and the q-axis fundamental current i_q that have been detected and the electrical rotation speed ω of the motor M.

$$\begin{aligned}
e_{Ldh} &= -(2n+1) \frac{L_n i_q \omega}{2} \\
e_{Lqh} &= -(2n+1) \frac{L_n i_d \omega}{2} \dots \quad (7)
\end{aligned}$$

[0031] It goes without saying that since the motor inductance also changes in correspondence to the motor current

value, L_n may be handled as a variable instead of a constant by referencing a table prepared in advance for an appropriate value or by expressing L_n as a function of the current.

[0032] In addition, the harmonic speed electromotive forces ed_h and eq_h attributable to the higher harmonic component in the magnetic flux of the permanent magnet are expressed as in (6) as explained earlier. The estimated harmonic speed electromotive force values Kd_{hw} and Kq_{hw} , respectively representing the sums of the harmonic speed electromotive forces ed_h and eq_h attributable to the higher harmonic components in the magnetic flux of the permanent magnet expressed in (6) and the harmonic speed electromotive forces eL_{dh} and eL_{qh} attributable to the higher harmonic components in the motor inductances expressed in (7), are calculated through the formulae in (8) below.

$$Kd_{hw} = ed_h + eL_{dh}$$

$$Kq_{hw} = eq_h + eL_{qh} \quad (8)$$

The adder 36 shown in FIG. 2 adds harmonic speed electromotive force values Kd_{hw} and Kq_{hw} thus calculated to the output obtained by implementing the PI control on the dh -axis higher harmonic current and the qh -axis higher harmonic current, i.e., the output from the PI- dh_{qh} current control circuit 34, to calculate the dh -axis voltage command value v_{dh_cmd} and the qh -axis voltage command value v_{qh_cmd} through the formulae in (9) below.

$$\begin{aligned} V_{dh_cmd} &= \left(K_{pdh} + \frac{K_{idh}}{s} \right) (i_{dh_cmd} - i_{dh}) + K_{dhw} \\ V_{qh_cmd} &= \left(K_{pqh} + \frac{K_{iqh}}{s} \right) (i_{qh_cmd} - i_{qh}) + K_{qhw} \end{aligned} \quad \dots \quad (9)$$

[0033] In expression (9), K_{pdh} , K_{pqh} , K_{idh} and K_{iqh} each represent a constant used in the PI (proportional integral) operation control in the PI- dh_{qh} current control circuit 34. Namely, K_{pdh} and K_{pqh} are the proportional constants along the dh -axis and the qh -axis respectively, whereas K_{idh} and K_{iqh} are the integral constants along the dh -axis and the qh -axis respectively. It is to be noted that by calculating $(2n + 1) L_n / 2$ in expression (7) in advance and providing it as a constant, the volume of the arithmetic operation can be reduced.

[0034] In the formulae in expression (9), both the harmonic speed electromotive forces attributable to the higher harmonic component in the magnetic flux of the permanent magnet and the harmonic speed electromotive forces attributable to the motor inductances higher harmonic components are estimated. However, if the effect of the harmonic speed electromotive forces attributable to the motor inductances higher harmonic components is insignificant but the harmonic speed electromotive forces attributable to the higher harmonic components in the magnetic flux of the permanent magnet is significant, only the harmonic speed electromotive forces attributable to the higher harmonic components in the magnetic flux of the permanent magnet expressed in (6) needs to be compensated. If, on the other hand, the effect of the harmonic speed electromotive forces attributable to the higher harmonic components in the magnetic flux of the permanent magnet is not significant but harmonic speed electromotive forces attributable to the motor inductance higher harmonic component is significant, only the harmonic speed electromotive forces attributable to the motor inductance higher harmonic component expressed in (7) needs to be compensated. In either of these cases, the harmonic speed electromotive force can be effectively compensated through a simple structure.

[0035] FIG. 3 presents the results of a simulation of the higher harmonic current control achieved in the embodiment. The results presented in FIG. 3 were obtained through a simulation conducted by implementing control of higher harmonic currents of the fifth order, i.e., by setting the current command values for the higher harmonic currents of the fifth order to 0. A comparison of the higher harmonic current control in the related art implemented without any harmonic speed electromotive force compensation and the higher harmonic current control achieved in the first embodiment by compensating the harmonic speed electromotive force reveals that compared to the control implemented in the related art, the control in the first embodiment greatly reduces the length of time elapsing between the control start and control convergence. In other words, by utilizing the motor control apparatus in the first embodiment, higher harmonic current control with quick response is realized and a highly efficient motor current control system can be realized through accurate control of the higher harmonic currents.

[0036] In the motor control apparatus in the first embodiment having the fundamental current control circuit 2 that

controls the fundamental currents in the motor M in the dq-axis coordinate system rotating in synchronization with the rotation of the 3-phase synchronous motor M and the higher harmonic current control circuit 3 that controls the higher harmonic currents in the motor M in the dhqh-axis higher harmonic coordinate system rotating at a frequency that is an integral multiple of the frequency of the fundamental components of the currents flowing through the 3-phase synchronous motor M, the harmonic speed electromotive forces in the motor M in the dhqh-axis higher harmonic coordinate system is estimated and the estimated harmonic speed electromotive forces are compensated. In other words, since the compensation is achieved by adding the estimated harmonic speed electromotive force values to the higher harmonic voltage command values used to set the higher harmonic currents in the dhqh-axis coordinate system to 0, the harmonic speed electromotive forces which cause a disturbance to the higher harmonic current control is compensated to improve the response of the higher harmonic current control system and, as a result, more efficient and higher performance drive control of the 3-phase synchronous motor M is realized by reducing the higher harmonic currents.

[0037] It is to be noted that in the first embodiment, the higher harmonic voltage command values v_{dh_cmd} and v_{qh_cmd} in the dhqh-axis higher harmonic coordinate system are first converted to the voltage command values v_{uh} , v_{vh} and v_{wh} in the 3-phase AC coordinate system and then the voltage command values v_{u_tmp} , v_{v_tmp} and v_{w_tmp} in the 3-phase AC coordinate system are calculated by adding the voltage command values v_{u_tmp0} , v_{v_tmp0} and v_{w_tmp0} output from the fundamental current control circuit 2 to the voltage command values v_{uh} , v_{vh} and v_{wh} . However, the voltage command values v_{u_tmp} , v_{v_tmp} and v_{w_tmp} in the 3-phase AC coordinate system may instead be calculated through dq/3-phase conversion after adding the higher harmonic voltage command values v_{dh_cmd} and v_{qh_cmd} in the dhqh-axis higher harmonic coordinate system to the fundamental voltage command values v_d_cmd and v_q_cmd in the dq-axis coordinate system. Alternatively, the higher harmonic voltage command values v_{dh_cmd} and v_{qh_cmd} in the dhqh-axis higher harmonic coordinate system may first be converted to higher harmonic voltage command values in an $\alpha\beta$ axis coordinate system, the converted command values may be added with an α -axis fundamental voltage command value and a β -axis fundamental voltage command value and the sums may be converted to values in the 3-phase AC coordinate system to calculate 3-phase AC voltage command values.

Second Embodiment

[0038] FIG. 4 shows in detail the structures assumed in the fundamental current control circuit 2 and a higher harmonic current control circuit 3A in the second embodiment. It is to be noted that since the overall structure of the motor control apparatus achieved in the second embodiment is similar to the structure shown in FIG. 1, its illustration and explanation are omitted. In addition, the same reference numerals are assigned to components similar to those in FIG. 2 to focus on an explanation of the features that differentiate the second embodiment. While the d-axis actual current i_d and the q-axis actual current i_q are input to the harmonic speed electromotive force estimating circuit 35 in the first embodiment, the d-axis current command value i_{d_cmd} and the q-axis current command value i_{q_cmd} are input to the harmonic speed electromotive force estimating circuit 35A in the second embodiment.

[0039] By using the current command values i_{d_cmd} and i_{q_cmd} instead of the d-axis actual current i_d and the q-axis actual current i_q , the adverse effect of noise and the like contained in the actual currents i_d and i_q detected by the current sensor 6 is eliminated. Namely, the harmonic speed electromotive forces e_{Ldh} and e_{Lqh} attributable to the higher harmonic components in the inductances can be estimated with a higher degree of accuracy. In addition, since an arithmetic operation is performed to estimate the harmonic speed electromotive force values K_{dhw} and K_{qhw} during each cycle of the arithmetic operation executed to calculate the current command values i_{d_cmd} and i_{q_cmd} , the cycle of the arithmetic operation for estimating the harmonic speed electromotive forces becomes longer than the cycle of the current control. As a result, the harmonic speed electromotive force values K_{dhw} and K_{qhw} can be estimated without having to increase the volume of the arithmetic operation performed in the current control cycle.

Third Embodiment

[0040] FIG. 5 shows in detail the structures assumed in the fundamental current control circuit 2 and a higher harmonic current control circuit 3B in the third embodiment. It is to be noted that since the overall structure of the motor control apparatus achieved in the third embodiment is similar to the structure shown in FIG. 1, its illustration and explanation are omitted. In addition, the same reference numerals are assigned to components similar to those in FIG. 2 to focus on an explanation of the features that differentiate the third embodiment. In the first embodiment explained earlier, the harmonic speed electromotive force estimating circuit 35 is employed to estimate the harmonic speed electromotive force values K_{dhw} and K_{qhw} . In the third embodiment, a disturbance observer 38 is employed in place of the harmonic speed electromotive force estimating circuit 35 to estimate the harmonic speed electromotive force values K_{dhw} and K_{qhw} .

[0041] FIG. 6 shows the structure adopted in the disturbance observer 38. The dh-axis higher harmonic current i_{dh} and the qh-axis higher harmonic current i_{qh} , the dh-axis higher harmonic voltage command value v_{dh_cmd} and the

qh-axis higher harmonic voltage command value v_{qh_cmd} are input to the disturbance observer 38. Inverse systems 38a and 38b of the plant (the control target, i.e., the 3-phase synchronous motor M) to be used in the disturbance observer 38 are achieved through approximation based upon the resistance R and the inductance L_{g0} of the motor M representing the typical characteristics in the circuit equation (5). After the subtractors 38c and 38d respectively subtract the values obtained at the plant inverse systems 38a and 38b from dh-axis higher harmonic voltage command value v_{dh_cmd} and the qh-axis higher harmonic voltage command value v_{qh_cmd} , the adverse effect of noise is reduced through filters 38e and 38f. As a result, harmonic speed electromotive force values K_{dhw} and K_{qhw} which vary at a lower frequency compared to the cut-off frequency at the filters 38e and 38f can be obtained through the arithmetic operation.

[0042] It is to be noted that while primary low pass filters are used as the filters 38e and 38f in the third embodiment, secondary low pass filters may be utilized instead. In addition, instead of performing approximation by using the resistance R and the inductance L_{g0} of the motor M to achieve the inverse systems of the plant, the plant characteristics may be determined in conformance to the frequency characteristics of the motor M.

[0043] By adding the harmonic speed electromotive force values K_{dhw} and K_{qhw} estimated by the disturbance observer 38 to the dh-axis higher harmonic voltage command value and the qh-axis higher harmonic voltage command value output by the PI-dhqh current control circuit 34, the adverse effect of the harmonic speed electromotive force can be reduced. In the third embodiment, the harmonic speed electromotive force can be estimated and compensated even when the higher harmonic components of the motor inductances are not known or when they change, or even when the higher harmonic component in the magnetic flux of the permanent magnet are not known.

[0044] FIG. 7 presents the results of a simulation of the higher harmonic current control achieved in the third embodiment. FIG. 7 shows the results of a simulation of control implemented on a fifth-order higher harmonic current contained in the motor current. The fifth-order higher harmonic current command value is set to 0. While the point in time at which convergence occurs varies in correspondence to the pole ω_c of the disturbance observer 38, a comparison of the higher harmonic current control in the related art implemented without compensating the harmonic speed electromotive force and the higher harmonic current control achieved in the third embodiment by compensating the harmonic speed electromotive force reveals that the third embodiment realizes quicker response compared to the prior art. It is to be noted that instead of a disturbance observer adopting the structure described above, which is employed in the third embodiment, an identity observer achieved based upon an equation of state or a finite setting time observer may be utilized.

[0045] The above described embodiments are examples, and various modifications can be made without departing from the spirit and scope of the invention. While a permanent magnet 3-phase synchronous motor is used in the explanation of the embodiments given above, the type of motor is not limited to that of the embodiments and a 3-phase inductive motor, for instance, may be used instead.

Claims

1. A motor control apparatus, comprising:

a fundamental current control means (2) for controlling a fundamental current in a 3-phase AC motor (M) in an orthogonal coordinate system constituted of a d-axis and a q-axis (hereafter referred to as a dq-axis coordinate system) rotating in synchronization with the rotation of the 3-phase AC motor (M);

a higher harmonic current control means (3) for controlling a higher harmonic current in the motor (M) in an orthogonal coordinate system constituted of a dh-axis and a qh-axis (hereafter referred to as a dhqh-axis coordinate system) rotating at a frequency that is an integral multiple of the frequency of a fundamental component of the current flowing to the motor (M);

an estimation means (35, 35A, 38) for estimating the harmonic speed electromotive force in the motor (M) in the dhqh-axis coordinate system; and

a compensation means (36) for compensating the harmonic speed electromotive force estimated by the estimation means.

2. A motor control apparatus according to claim 1, wherein:

the higher harmonic current control means (3) outputs a higher harmonic voltage command value to be used to set the higher harmonic current in the dhqh-axis coordinate system to 0; and

the compensation means (36) compensates the harmonic speed electromotive force by adding the estimated value for the harmonic speed electromotive force to the higher harmonic voltage command value.

3. A motor control apparatus according to claim 1, wherein:

the estimation means (35, 35A, 38) estimates a harmonic speed electromotive force attributable to a higher harmonic component in an inductance of the motor (M).

4. A motor control apparatus according to claim 1, wherein:

the 3-phase AC motor (M) is a permanent magnet synchronous motor; and
the estimation means (35, 35A, 38) estimates a harmonic speed electromotive force attributable to a higher harmonic component in the magnetic flux of the permanent magnet in the motor (M).

5. A motor control apparatus according to claim 1, wherein:

the 3-phase AC motor (M) is a permanent magnet synchronous motor; and
the estimation means (35, 35A, 38) estimates a harmonic speed electromotive force attributable to a higher harmonic component in the magnetic flux of the permanent magnet in the motor (M) and a higher harmonic component in an inductance of the motor (M).

6. A motor control apparatus according to claim 3, wherein:

the estimation means (35, 35A, 38) estimates the harmonic speed electromotive force attributable to the inductance of the motor (M) based upon a fundamental current command value of the motor (M) in the dq-axis coordinate system, an electrical rotation speed of the motor (M) and the higher harmonic component in the inductance.

7. A motor control apparatus according to claim 3, wherein:

the estimation means (35, 35A, 38) estimates the harmonic speed electromotive force attributable to the inductance of the motor (M) based upon a d-axis fundamental current and a q-axis fundamental current in the motor (M), an electrical rotation speed of the motor (M) and the higher harmonic component in the inductance.

8. A motor control apparatus according to claim 4, wherein:

the estimation means (35, 35A, 38) estimates the harmonic speed electromotive force attributable to the higher harmonic component in the magnetic flux of the permanent magnet in the motor (M) based upon the higher harmonic component in the magnetic flux of the permanent magnet in the motor (M) and an electrical rotation speed of the motor (M).

9. A motor control apparatus according to claim 1, wherein:

the estimation means (35, 35A, 38) is a disturbance observer constituted by using a resistance of the motor (M) and a fundamental component of inductances in the motor (M) as a parameter.

10. A motor control method adopted in a motor control apparatus having a fundamental current control device (2) that controls a fundamental current in a 3-phase AC motor (M) in an orthogonal coordinate system constituted of a d-axis and a q-axis rotating in synchronization with the rotation of the 3-phase AC motor (M) and a higher harmonic current control device (3) that controls a higher harmonic current in the motor (M) in an orthogonal coordinate system constituted of a dh-axis and a qh-axis (hereafter referred to as a dhqh-axis coordinate system) rotating at a frequency that is an integral multiple of the frequency of a fundamental component of the current flowing to the motor (M), comprising:

estimating a harmonic speed electromotive force in the motor (M) in the dhqh-axis coordinate system; and
compensating the estimated harmonic speed electromotive force.

FIG. 1



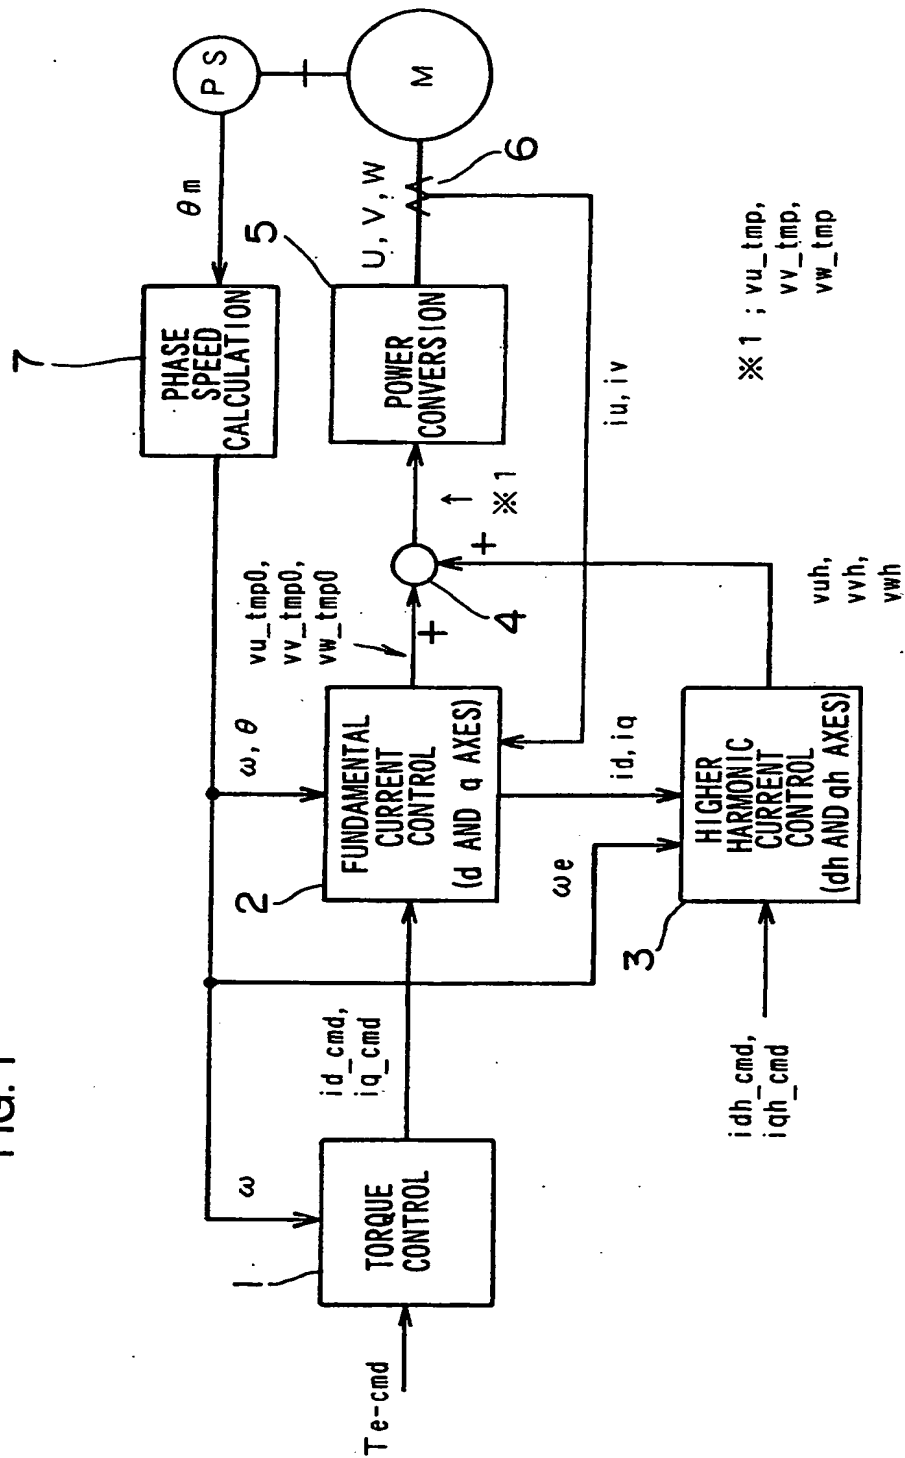


FIG. 2

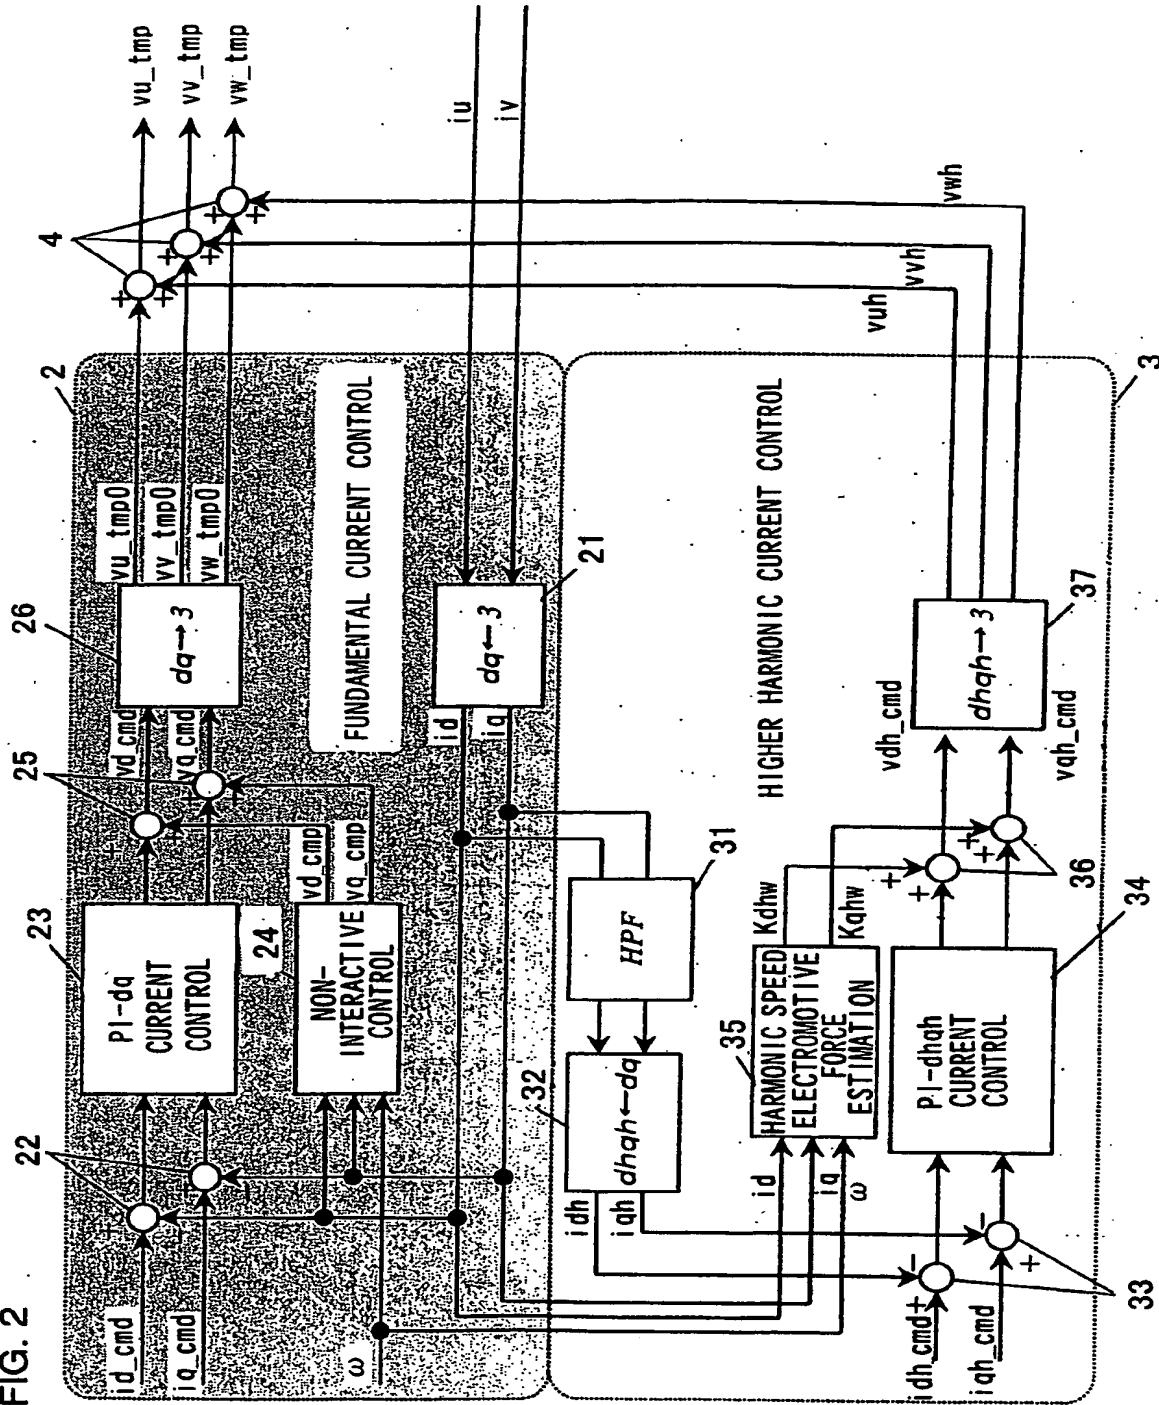


BEST AVAILABLE COPY

FIG. 3

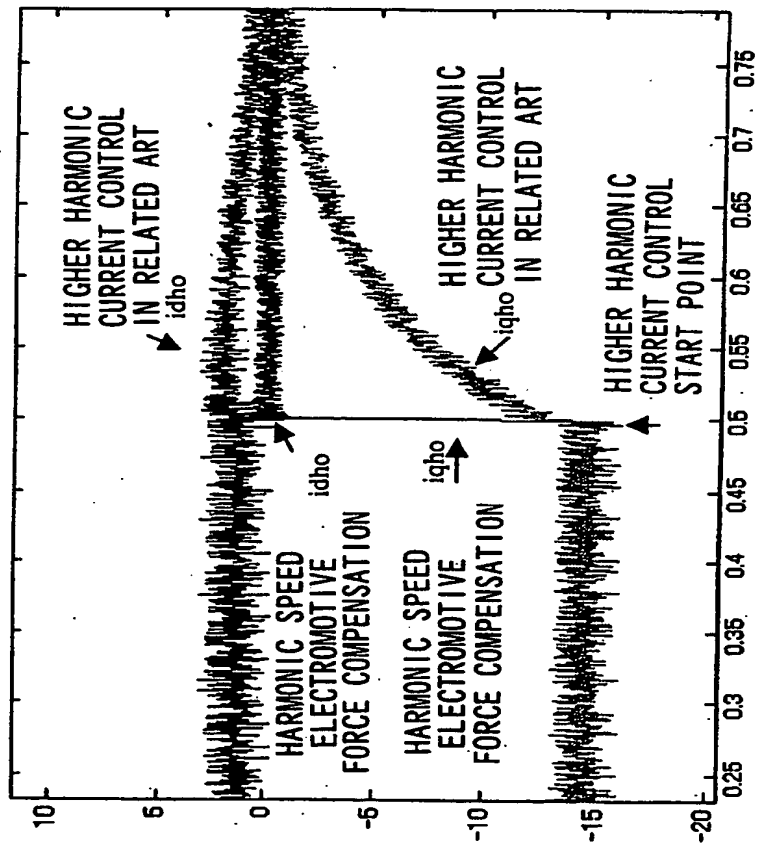

BEST AVAILABLE COPY

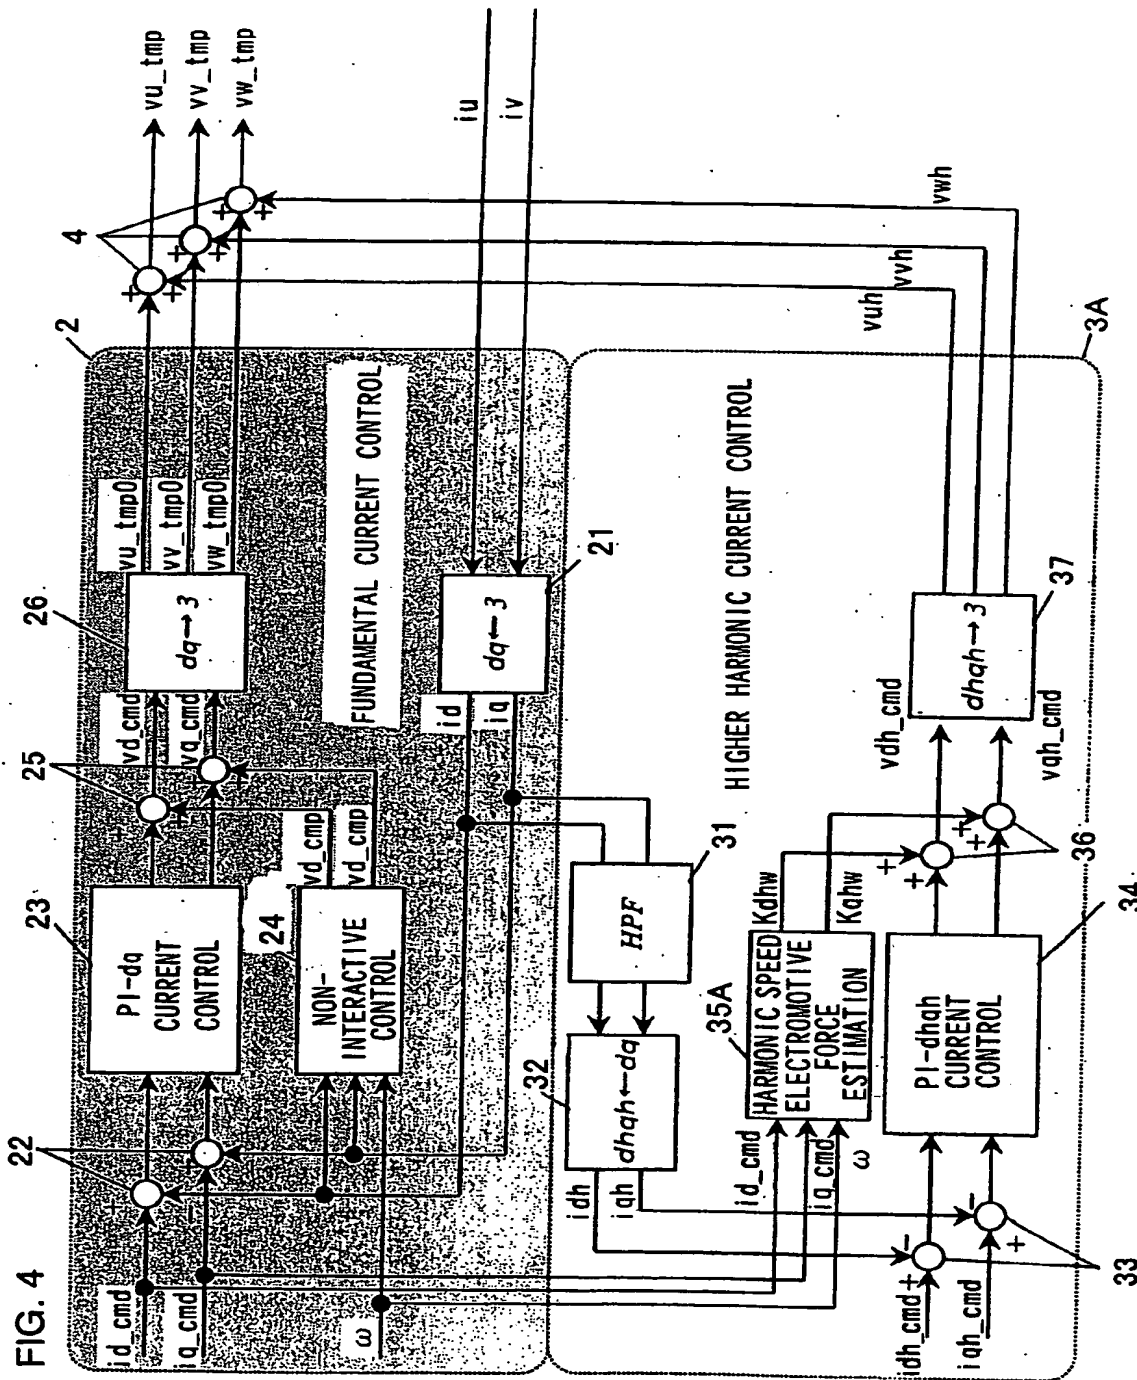

BEST AVAILABLE COPY

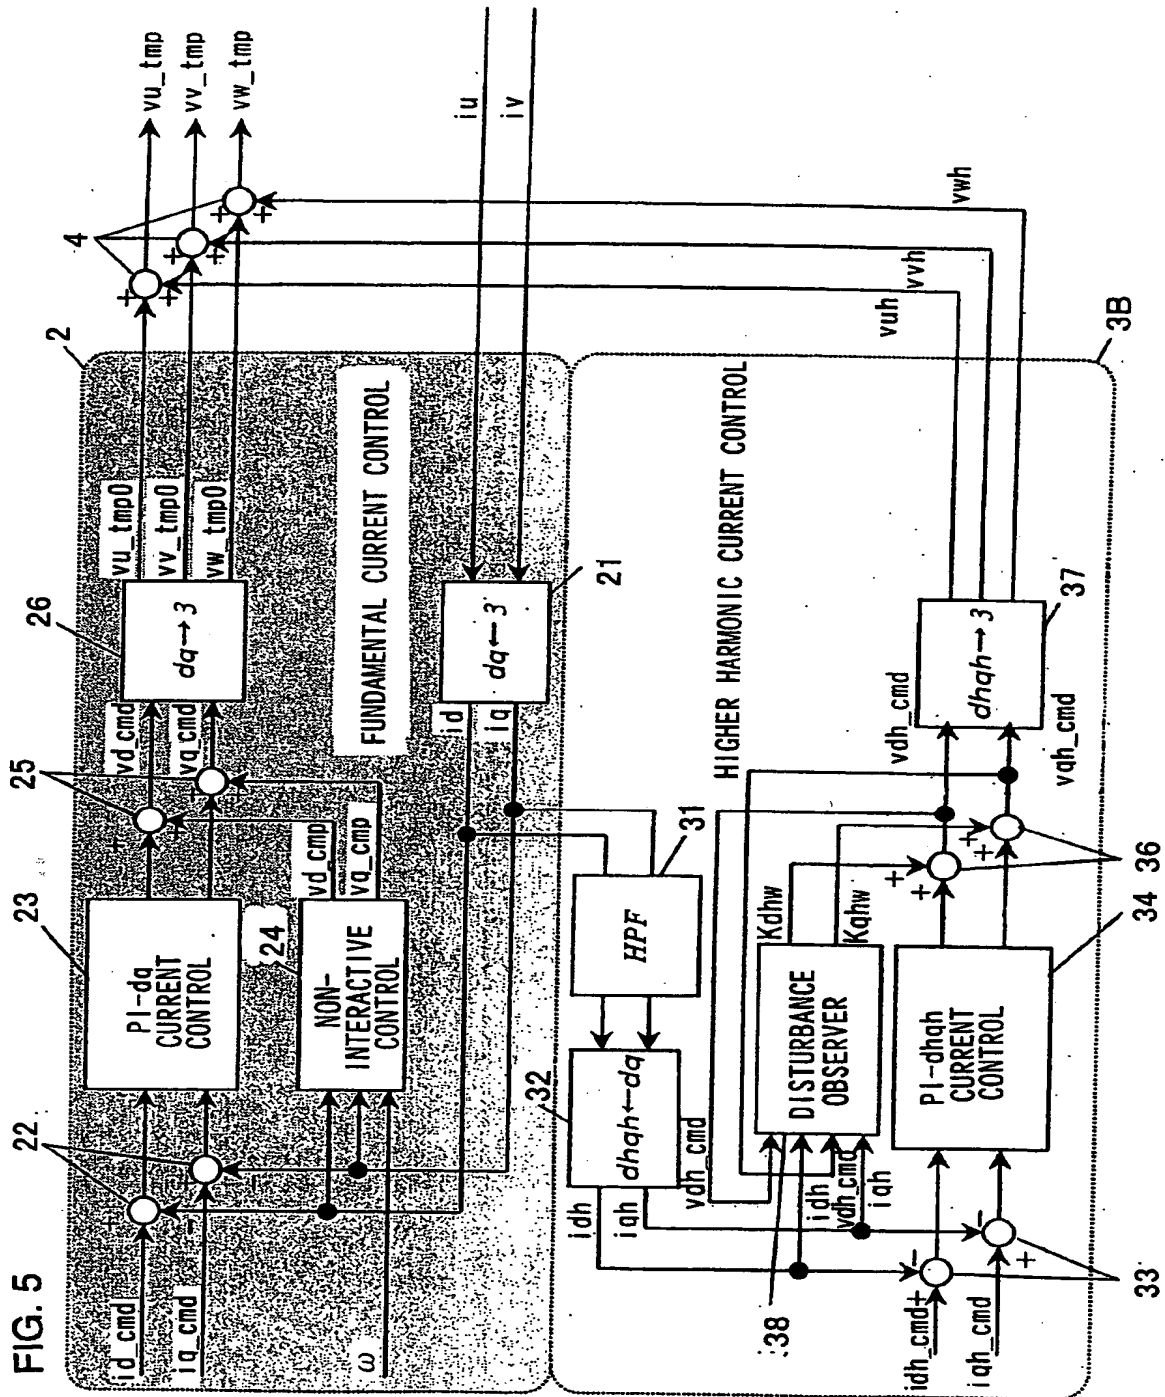


FIG.6



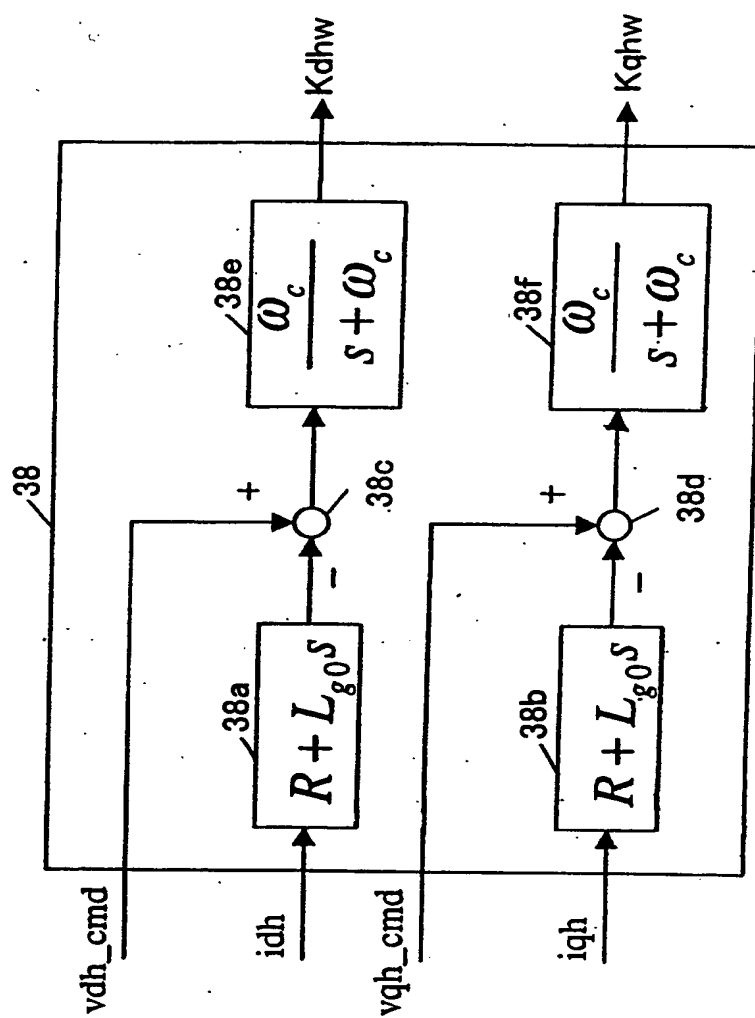


FIG. 7

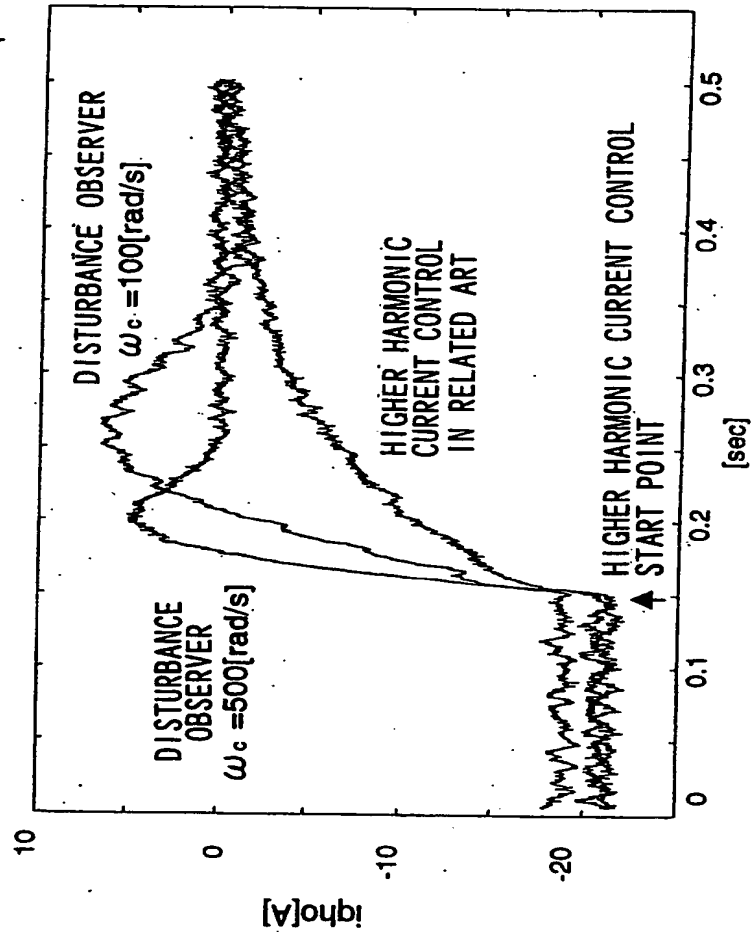

BEST AVAILABLE COPY



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) EP 1 292 011 A3

(12) EUROPEAN PATENT APPLICATION

(88) Date of publication A3:
02.02.2005 Bulletin 2005/05

(51) Int Cl.7: H02P 21/00

(43) Date of publication A2:
12.03.2003 Bulletin 2003/11

(21) Application number: 02018593.0

(22) Date of filing: 19.08.2002

(84) Designated Contracting States:
AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
IE IT LI LU MC NL PT SE SK TR
Designated Extension States:
AL LT LV MK RO SI

(72) Inventors:
• Yoshimoto, Kantaro
Yokohama-shi, Kanagawa (JP)
• Kitajima, Yasuhiko
Kamakura-shi, Kanagawa (JP)

(30) Priority: 10.09.2001 JP 2001273515

(74) Representative: Weber, Joachim, Dr.
Hoefer & Partner
Patentanwälte
Gabriel-Max-Strasse 29
81545 München (DE)


(71) Applicant: Nissan Motor Co., Ltd.
Yokohama-shi, Kanagawa (JP)

(54) Motor control for reducing high harmonic currents

(57) A motor control apparatus comprises a fundamental current control means (2) for controlling a fundamental current in a 3-phase AC motor (M) in an orthogonal coordinate system constituted of a d-axis and a q-axis rotating in synchronization with the rotation of the 3-phase AC motor (M), a higher harmonic current control means (3) for controlling a higher harmonic current in the motor (M) in an orthogonal coordinate system con-

stituted of a dh-axis and a qh-axis rotating at a frequency that is an integral multiple of the frequency of the fundamental component of the current flowing to the motor (M), an estimation means (35, 35A, 38) estimating the level of the harmonic speed electromotive force in the motor (M) in the dhqh-axis coordinate system and a compensation means (36) for compensates the harmonic speed electromotive force estimated by the estimation means.

FIG. 1

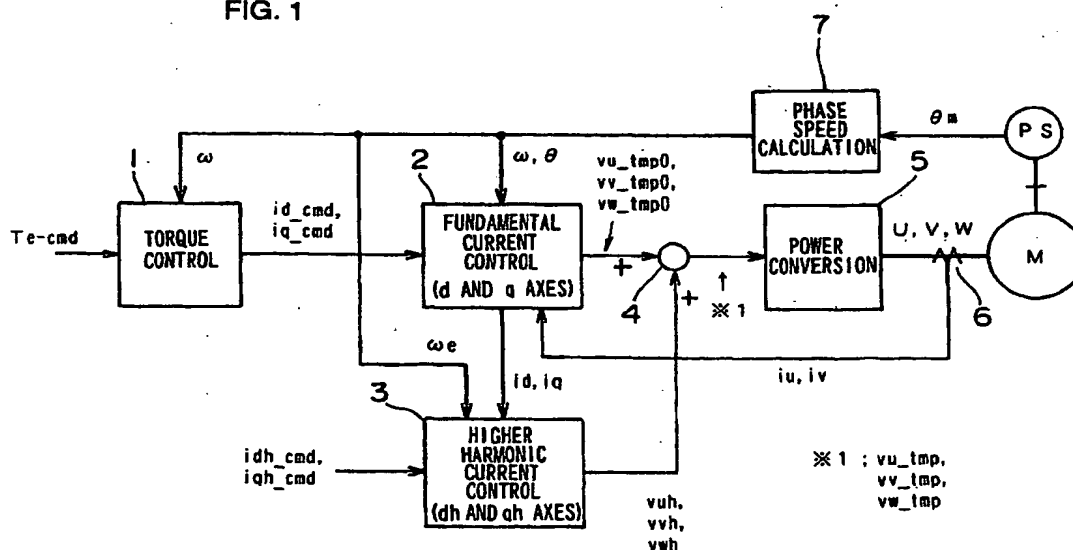



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 02 01 8593

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
A	EP 1 087 517 A (HITACHI LTD) 28 March 2001 (2001-03-28) * paragraph [0016] * * paragraph [0018] * * claim 1 *	1,10	H02P21/00 H02P6/10 H02P21/00
A	PATENT ABSTRACTS OF JAPAN vol. 1999, no. 05, 31 May 1999 (1999-05-31) & JP 11 041999 A (TOYO ELECTRIC MFG CO LTD), 12 February 1999 (1999-02-12) * abstract *	1,10	
			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
			H02P
The present search report has been drawn up for all claims			
Place of search Berlin		Date of completion of the search 2 December 2004	Examiner Foussier, P
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document</p>			

EPO FORM 1503 03.82 (P04001)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 02 01 8593

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

02-12-2004

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 1087517 A	28-03-2001	JP 3366858 B2	14-01-2003
		JP 11341864 A	10-12-1999
		EP 1087517 A1	28-03-2001
		US 6404152 B1	11-06-2002
		WO 9963654 A1	09-12-1999

JP 11041999 A	12-02-1999	NONE	

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82